Pneum. Switching Probes (NC)


PSK-350 291 100 A 0602 M-6


Item PSK-350-0007


GO TO PRODUCT

ingun®
Partner for Future Technology




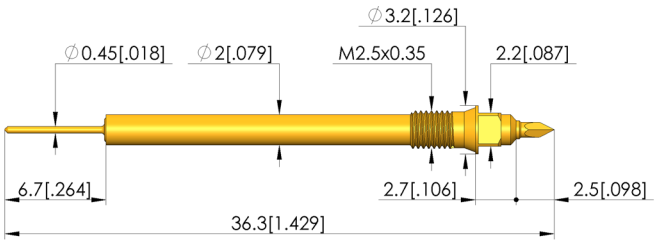







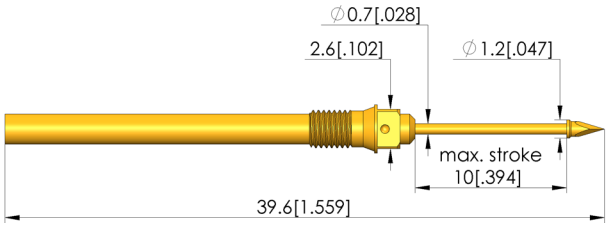

General data

Product group:	Pneumatic test probe
Sub-product group:	Pneumatic switching probes
Series:	PSK-350 M quick-exchange system, screw-in
Grid:	3.5 mm [137 mil]
Contacting from:	Pad, via
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	Yes
Type of test probe connection:	Clip
PKS operating pressure:	6 bar [87.0 psi]
Adjustable installation height:	No
Non-rotating:	No
Screw-in torque:	10 - 20 cNm [.885 - 1.77 lbf·in]
Compatible connector(s):	KL-300
Compatible receptacle(s):	KS-350 M
Min. temperature:	+ 0 °C [+ 32 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a;6c

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	<30 mOhm

Mechanical data

Total length:	36.3 mm [1.42 in]
Barrel diameter:	2 mm [.078 in]
Maximum stroke:	10 mm [.393 in]
Spring pre-load:	0.5 N [1.79 ozf]
Collar height:	02
Switch path:	6 mm [.236 in]
Switching point:	11.2 mm [.440 in]
Recommended working stroke:	6 mm [.236 in]

Tip style data

Tip style:	91 dagger, self-cleaning
Tip diameter:	1 mm [.039 in]
Tip style surface:	A gold
Tip style material:	2 steel


Pneum. Switching Probes (NC)


PSK-350 291 100 A 0602 M-6

Item PSK-350-0007

GO TO PRODUCT

Partner for Future Technology

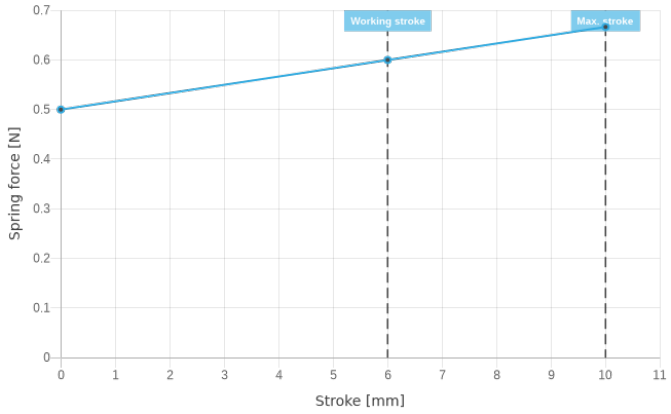

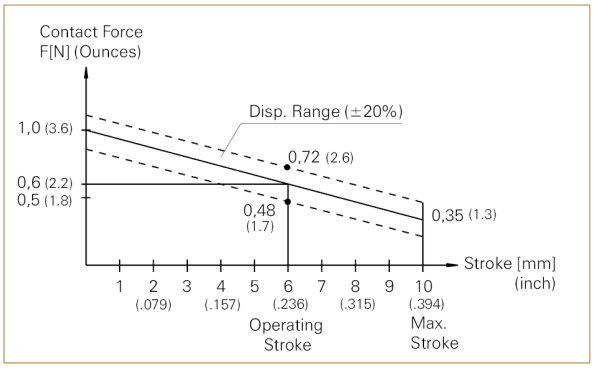

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com