NEW

Technical Data // 7115-USB-3.1C-M-024

USB 3.1-C - Standard

PTR HARTMANN
A Phoenix Mecano Company



Highlights	
Extended tip length (8.0 mm) - optimal reach even for recessed DUT socket	
Very low mating | unmating force, easy insertion	
Non-metal tip, low risk for damaging DUT	
Mechanical Data	
Temperature range	0 °C - 60 °C
Relative Humidity (non-condensing)	15 % - 95 %
Test cycles	250.000
Mating Force	12.0 N
Unmating Force	10.0 N
RoHS compliant	yes
Lead free	yes
Electrical Data	
PWD data	90.0 Ohm
Voltage	20.0 V AC (rms)
Current (power)	1.25 A - pin A1/A4/A9/A12/B1/B4/B9/B12
Current (signal)	0.25 A
Test Application	
Device under test (DUT)	USB-3.1C-F
Gender	female / socket
Accessories	
Article Designation	FU 7115 - USB C


NEW

Technical Data // 7115-USB-3.1C-M-024

USB 3.1-C - Standard

PTR HARTMANN
A Phoenix Mecano Company

Technical Drawing Accessorie

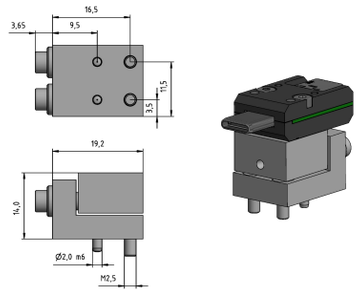

Technical Drawing

