
NEW

Technical Data // 7111-MICRO.USB.B-M-005-HC

Micro USB 2.0 - High-Current

PTR HARTMANN
A Phoenix Mecano Company



Highlights	
5-pin test connector	
Up to 250.000 cycles	
Safe transmission of data rates	
Mechanical Data	
Temperature range	0 °C - 60 °C
Relative Humidity (non-condensing)	15 % - 95 %
Test cycles	250.000
Mating Force	35.0 N
Unmating Force	25.0 N
RoHS compliant	yes
Lead free	yes
Electrical Data	
PWD data	90.0 Ohm
Voltage	30.0 V AC (rms)
Current (power)	1.8 A - pin 1/5
Current (signal)	1.0 A - pin 2/3/4
Test Application	
Device under test (DUT)	Micro.USB.B-F
Gender	female / socket
Interface	
Interface	Micro-B plug and micro-AB receptacle ESD GND tab 2.8 x 0.51 mm
Accessories	
Article Designation	FU 7110 - Micro USB


NEW

Technical Data // 7111-MICRO.USB.B-M-005-HC

Micro USB 2.0 - High-Current

PTR HARTMANN
A Phoenix Mecano Company

Technical Drawing Accessorie

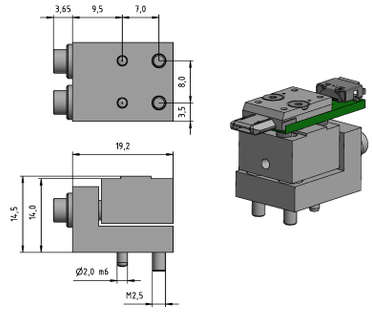

Technical Drawing

