
NEW

Technical Data // 7154-MINI.DISPLAYPORT-M-20

Mini Display Port - Standard

PTR HARTMANN
A Phoenix Mecano Company



Highlights	
20-pin thundervolt test connector	
Up to 250.000 cycles	
Safe transmission of data rates	
Mechanical Data	
Temperature range	0 °C - 60 °C
Relative Humidity (non-condensing)	15 % - 95 %
Test cycles	250.000
Mating Force	44.0 N
Unmating Force	40.0 N
RoHS compliant	yes
Lead free	yes
Electrical Data	
PWD data	100.0 Ohm
Voltage	40.0 V AC (rms)
Current (power)	0.5 A - pin 1/7/8/13/14/19/20
Current (signal)	0.25 A
Test Application	
Device under test (DUT)	Mini.Displayport-F
Gender	female / socket
Accessories	
Article Designation	FU 7154 - Mini Displayport


NEW

Technical Data // 7154-MINI.DISPLAYPORT-M-20

Mini Display Port - Standard

PTR HARTMANN
A Phoenix Mecano Company

Technical Drawing Accessorie

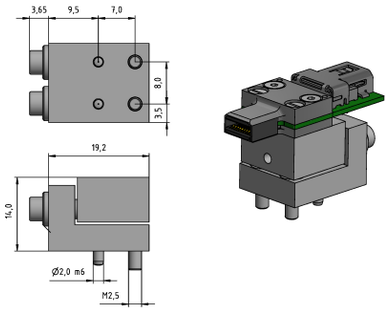

Technical Drawing

