
Линейный подпружиненный пого-пин

ALP24

ALP24

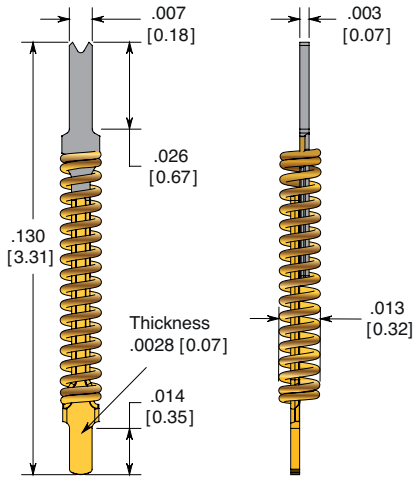

Mechanical

Pitch:	0.40mm
Recommended Travel:	0.64mm
Full Travel:	0.71mm
Test Height:	2.67mm
Mechanical Life*:	500,000 cycles
Operating Temperature:	-55°C to +155°C
Spring Force:	0.34 N

Electrical (Static Conditions)

Current Rating DC:	2.0 A
Average DC Probe Resistance** :	<85 mOhm
Self Inductance (Ls):	1.07 nH
Capacitance (Cc):	0.21 pF
Bandwidth @ -1dB:	30.0 GHz

Materials and Finishes

Plunger DUT:	BeCu with, Gold plated
Plunger HIB:	BeCu Nikel plating
Spring:	Stainless Steel, Gold plated

Высокая пропускная способность

Серия ALP24 обеспечивает максимально высокую и стабильную полосу пропускания среди контактов данного типоразмера. Высокие эксплуатационные характеристики делают эти контакты оптимальным решением для выполнения наиболее сложных и требовательных задач тестирования.

Tip Style - DUT



Tip Style - HIB



HYPERcore™ [base material]

