NEW

Series FKB5322 - L01


Interface Pin Blocks 100 mil / 2.54 mm

BENEFIT	
Short, compact size	
Connection with wire and strange wire possible	
2 to 20 poles / 1 and 2 rows available	
MECHANICAL DATA	
Center	2.54 mm / 100 mil
Full Travel	1.40 mm
Working Travel	0.70 mm
Pre-Loaded Spring Force	0.25 N
Spring Force at Working Travel	0.85 N
ELECTRICAL DATA	
Max. Current Rating	3.5 A
Typical Continuity Resistance	≤ 20 mOhm
MATERIALS	
Barrel	Brass, gold-plated
Spring	Spring Steel, gold-plated
Plunger	Brass, gold-plated
Test Probe Block	PA
OPERATING LIFE	
Cycle	50.000


ORDER DATA

Poles	Width (mm)	Article Designation	Article Number	PU
FKB 5322/1 - L01				
2	5.08	FKB 5322/1-02-65-L01	65322F30265L	PCS100
3	7.62	FKB 5322/1-03-65-L01	65322F30365L	PCS100
4	10.16	FKB 5322/1-04-65-L01	65322F30465L	PCS100
5	12.70	FKB 5322/1-05-65-L01	65322F30565L	PCS100
6	15.24	FKB 5322/1-06-65-L01	65322F30665L	PCS100
7	17.78	FKB 5322/1-07-65-L01	65322F30765L	PCS100
8	20.32	FKB 5322/1-08-65-L01	65322F30865L	PCS100
9	22.86	FKB 5322/1-09-65-L01	65322F30965L	PCS100
10	25.40	FKB 5322/1-10-65-L01	65322F31065L	PCS100
FKB 5322/2 - L01				
4	5.08	FKB 5322/2-04-65-L01	65322F40465L	PCS100
6	7.62	FKB 5322/2-06-65-L01	65322F40665L	PCS100
8	10.16	FKB 5322/2-08-65-L01	65322F40865L	PCS100
10	12.70	FKB 5322/2-10-65-L01	65322F41065L	PCS100
12	15.24	FKB 5322/2-12-65-L01	65322F41265L	PCS100
14	17.78	FKB 5322/2-14-65-L01	65322F41465L	PCS100
16	20.32	FKB 5322/2-16-65-L01	65322F41665L	PCS100
18	22.86	FKB 5322/2-18-65-L01	65322F41865L	PCS100
20	25.40	FKB 5322/2-20-65-L01	65322F42065L	PCS100

FKB5322/1-L01

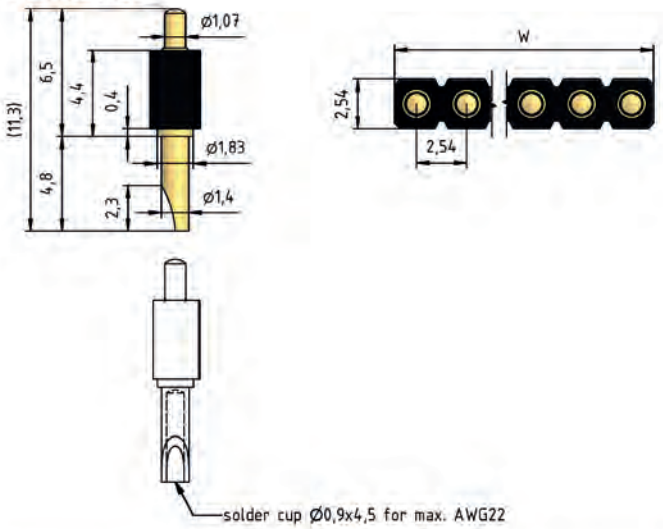

FKB5322/2-L01

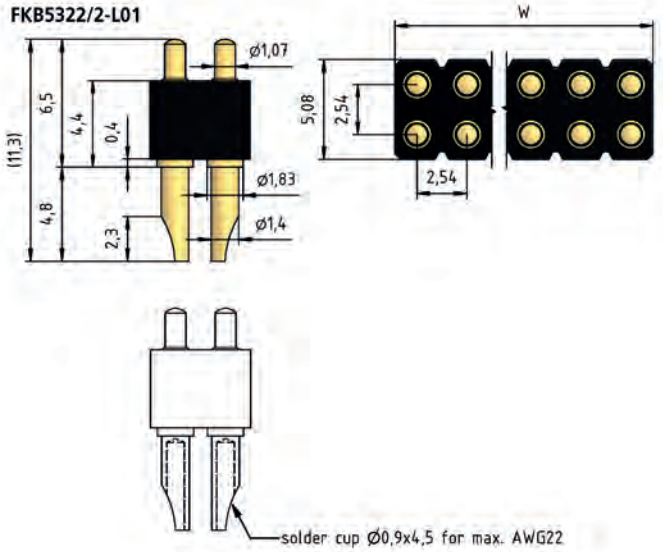

HOW TO ORDER

FKB5322	/1	-	2	-	65	-	L01
1	2		3		4		5

1 Series 2 Number of Rows 3 Poles 4 Installation Height 5 Variant