Contact terminal A


KT-150 L3 E03 M3


Item KT-150L3E03M3


GO TO PRODUCT

ingun®
Partner for Future Technology

INGUN SELECTION

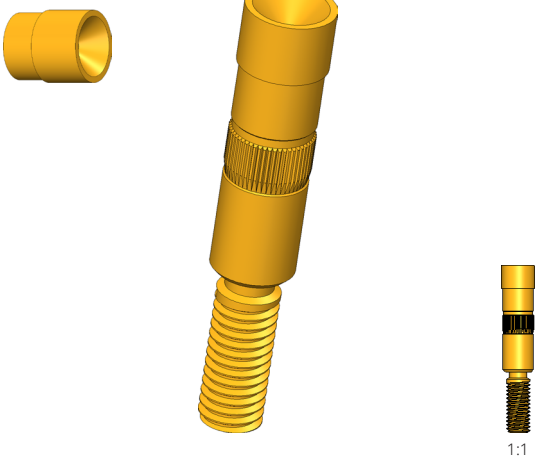

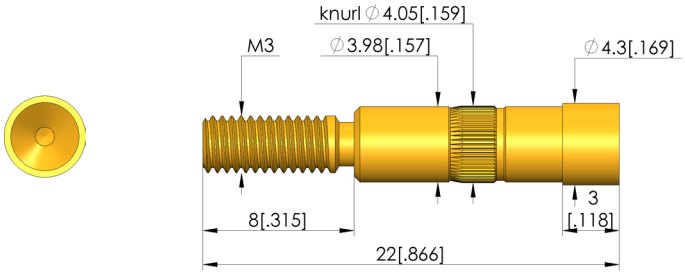



General data

Product group:	Contact terminals (KT)
Series:	KT-150
Sub-series:	KT-150
Grid:	5.08 mm [200 mil]
Type of contact terminal connection:	Thread connection
Magnetic:	Yes
Installation type:	Press-in
Quick-exchange system:	No
Surface area:	A gold
Material:	1 brass
Knurl:	Yes
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	4.00 - 4.02 mm [.157 - .158 in]
Mounting hole in FR4:	4.00 - 4.02 mm [.157 - .158 in]

Mechanical data

Collar height:	03
Total length:	22 mm [.866 in]
Shaft diameter:	3.98 mm [.156 in]
Latching lug:	No

Tip style data

Tip style:	43 inverse cone with champfered bore
Tip diameter:	4.3 mm [.169 in]
Bore Ø in tip style:	1 mm [.039 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

CONTACT TERMINALS

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com