Contact terminal A

KT-S-075 47 35


Item KT-S075-0001

GO TO PRODUCT


ingun®
Partner for Future Technology


- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

NEW

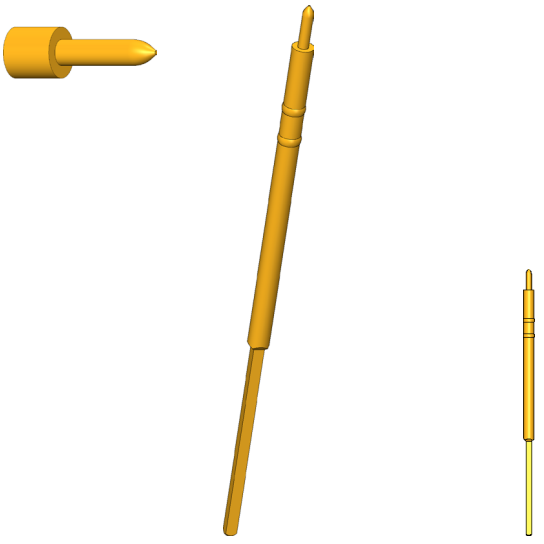

1:1

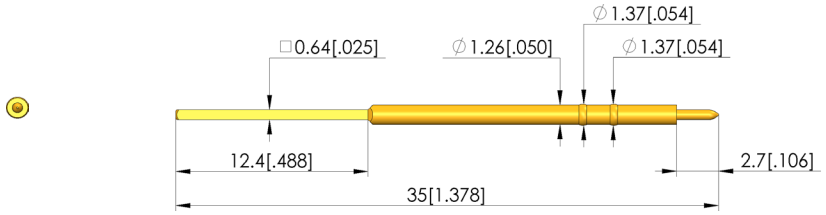



General data

Product group:	Contact terminals (KT)
Series:	KT-S075
Sub-series:	KT-S075 standard
Grid:	1.91 mm [75 mil]
Type of contact terminal connection:	Wire-wrap
Magnetic:	Yes
Installation type:	Press-in
Quick-exchange system:	No
Surface area:	A gold
Material:	3 CuBe
Knurl:	No
RoHS-compliant:	RoHS-3;6c

Mounting hole

Mounting hole in CEM1:	1.31 - 1.33 mm [.051 - .052 in]
Mounting hole in FR4:	1.31 - 1.33 mm [.051 - .052 in]

Mechanical data

Total length:	35 mm [1.37 in]
Shaft diameter:	1.26 mm [.049 in]
Latching lug:	No

Tip style data

Tip diameter:	0.64 mm [.025 in]

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 01/25_GB