Coaxial cable, pre-wired

SE-FLX405-50SMPMFG050SMAMG


Item SE-FLX405-0001


GO TO PRODUCT


ingun®
Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

INGUN SELECTION





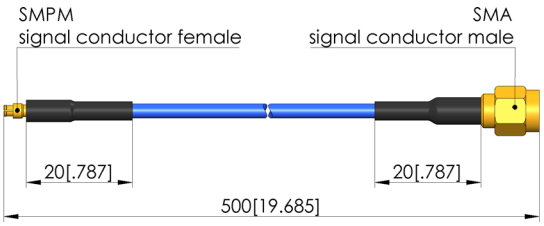

General data

Product group:	Assemblies
Series:	SE-FLX405
Sub-series:	SE-FLX405 plug
Min. temperature:	- 65 °C [- 149 °F]
Max. temperature:	+ 165 °C [+ 329 °F]
RoHS-compliant:	RoHS-3;6c

Cable data

Cable length:	50 cm [19.6 in]
Cable type:	RTK-FLEX405-SPC-FEP
Kink protection cable:	Shrink-on sleeve, black, 20 mm
Attenuation Fmax:	1.84 dB

Connector data

Interface 1:	SMPM mini-SMP
Interface gender 1:	F signal conductor female / socket
Version 1:	Straight
Interface 2:	SMA
Interface gender 2:	M signal conductor male / plug
Version 2:	Straight
Moment interface 2:	45 cNm [3.98 lbf·in]

Electrical data

Maximum frequency:	18 GHz
Impedance:	50 Ohm
Cable shielding:	Simple
Maximum performance:	28 W
Performance coefficient:	117 FLX405
Dielectric strength:	0.34 kV
Attenuation coefficient a:	0,69120 FLX405
Attenuation coefficient b:	0,04120 FLX405

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
Test probes

PLUG AND CABLE

Prices and delivery times on request.
Technical changes reserved. 02/25_GB

ingun.com