

# Contact terminal A


# KT-254 W-PL

Item KT-254W-PL

Partner for





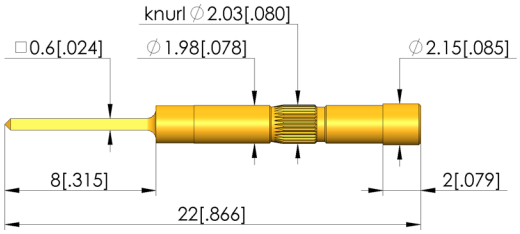


## General data

| | |
|---|---|
| Product group: | Contact terminals (KT) |
| Series: | KT-254 |
| Sub-series: | KT-254 |
| Grid: | 2.54 mm [100 mil] |
| Type of contact terminal connection: | Wire-wrap |
| Magnetic: | Yes |
| Installation type: | Press-in |
| Quick-exchange system: | No |
| Surface area: | A gold |
| Material: | 1 brass |
| Knurl: | Yes |
| RoHS-compliant: | RoHS-3;6c |

## Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 1.98 - 2.0 |
| Mounting hole in FR4: | 1.98 - 1.9 |

## Mechanical data

| | |
|---|---|
| Collar height: | |
| Total length: | |
| Shaft diameter: | |
| Latching lug: | |

## Tip style data

| | |
|---|---|
| Tip style: | |
| Tip diameter: | |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn
Tes

Prices and delivery times on request.
Technical changes reserved. 02/25_GB



ingun.com

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 02/25_GB





Learn
**Tes**